

# COMMERCIAL & INSTITUTIONAL PRODUCT RANGE LED PRICE LIST

w.e.f Jan 2021





**RR Global** is a USD 850 Million conglomerate in the electrical sector with a presence in over 85 countries globally. RR Global has always endeavored to create products of the higher quality using the latest in innovative technology. Spread across multiple business verticals including Wires & Cables, Switches, Fans, Switchgears, Busducts, Automated Multilevel Car Parking systems and now Lighting through our newest acquisition – Arraystorm.

**Arraystorm** is a recent addition to the portfolio of Brands under RR Global. RR Kabel, a name admired worldwide in the electrical industry with presence in over 85 countries globally, made acquisition of Arraystorm – a leading specialised lighting solutions provider. Arraystorm – is a premium LED lighting brand known for its energy-efficient customised lighting solutions. Arraystorm reinforces RR Kabel’s philosophy of offering unique innovative products & solutions and widens the choice for the customer at the premium end.

**Arraystorm** focuses on the functional & professional LED lighting business. We create energy-efficient lighting products at our state-of-the-art factory in Bengaluru. Our aim is to deliver custom designed, high quality and high value lighting solutions to people and places worldwide. Our products are insight-driven and specially designed to suit each and every customer. We believe that our strong focus on technology and innovation will make the world a brighter place. To us the future is a challenge, the kind that we are ready to meet head-on, and we progress on a daily basis to become India’s most innovative LED lighting application brand.

At Arraystorm, we do not design products, we design outcomes. Our products and solutions are a result of our futuristic thinking so as to create energy efficient and sustainable products. We do not consider the development of new lighting technologies to be our final destination, instead, we believe in focusing on addressing daily lighting problems. This helps us constantly deliver innovative, exciting, and practical solutions, to address our customers’ needs.





# INDOOR COMMERCIAL LIGHTING RANGE

Lighting needs to be an important consideration in an indoor commercial environment. A complete lighting solution needs to provide visual comfort, so that they have a feeling of well-being and have the ability to perform tasks with a high degree of accuracy over a long period of time. This can be achieved by providing adequate illuminance on the work bays and surrounding areas



## Application areas

Commercial workplaces  
Educational institutions  
Healthcare



## EPIC I



### RECESSED 1X1 LED GRIDLIGHT

Arraystorm EPIC 1 Recessed High Efficiency 1X1 LED Gridlight, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGL2001RFXXIN016	16	120	290   290	300   300   88	2900

## EPIC I



### RECESSED 2X2 LED GRIDLIGHT

Arraystorm EPIC 1 Recessed High Efficiency 2X2 LED Gridlight, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGL2002RFXXIN030	30	120	NA	595   595   88	4400
ASGL2002RFXXIN035	35	120	NA	595   595   88	4900
ASGL2002RFXXIN042	42	120	NA	595   595   88	5200

## ASTRO



### RECESSED 2X2 LED GRIDLIGHT

Arraystorm ASTRO Recessed 2X2 LED Gridlight, Body made of ABS Plastic and Aluminium Gear tray, Opal Diffuser, homogeneous light distribution. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGL2011RFXXIN028	28	120	NA	595   595   88	5300
ASGL2011RFXXIN032	32	120	NA	595   595   88	5400
ASGL2011RFXXIN038	38	120	NA	595   595   88	5900

## GENYSIS



### RECESSED | SURFACE 2X2 LED GRIDLIGHT

Arraystorm GENYSIS Recessed / Surface 2X2 LED Gridlight, Body made of ABS Plastic and Galvanised Gear tray, Opal Diffuser, homogeneous light distribution, 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGL2015RFXXIN030	30	120	NA	594   594   52	3850
ASGL2015RFXXIN035	35	120	NA	594   594   52	3950
ASGL2015RFXXIN042	42	120	NA	594   594   52	4450

## EPITOME



### RECESSED 2X2 LED GRIDLIGHT

Arraystorm EPITOME Recessed High Efficiency 2X2 LED Gridlight, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots, 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGL2006RFXXIN030	30	120	NA	595   595   110	7450
ASGL2006RFXXIN035	35	120	NA	595   595   110	7600
ASGL2006RFXXIN042	42	120	NA	595   595   110	7950



## EPIC II



### RECESSED 1X4 LED GRID LIGHT

Arraystorm EPIC II Recessed 1X4 Linear LED Grid light, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGL4002RFXXIN030	30	120	NA	1195   295   88	5250
ASGL4002RFXXIN035	35	120	NA	1195   295   88	5400
ASGL4002RFXXIN042	42	120	NA	1195   295   88	5800

## EPIC II



### RECESSED 2X4 LED GRID LIGHT

Arraystorm EPIC II Recessed High Efficiency 2X2 LED Grid light, Body made of CRCA and Opal Diffuser with homogeneous light distribution without hotspots, 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGL2004RFXXIN060	60	120	NA	1195   595   88	10400
ASGL2004RFXXIN070	70	120	NA	1195   595   88	10700
ASGL2004RFXXIN084	84	120	NA	1195   595   88	10900

## LINEAGE TZ R



### RECESSED LED TECHZONE GRID LIGHT

Arraystorm LINEAGE TZ High Efficiency Recessed Techzone LED Grid light, Body made of Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

For POP | Gypsum ceiling, frame to be ordered separately.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL14558RFXXIN030	30	120	NA	1195   145   58	6300
ASCL14558RFXXIN040	40	120	NA	2395   145   58	9900
ASCL14558RFXXIN060	60	120	NA	2395   145   58	10800





## SWANK DR



### DEEP RECESSED LED DOWN LIGHT

Arraystorm SWANK DR LED Deep Recessed High Efficiency Round Downlight, Body made of pressure diecast Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASDL1012RFXXIN007	7	120	110	120   50	1200
ASDL1012RFXXIN010	10	120	110	120   50	1590
ASDL1013RFXXIN015	15	120	145	155   58	1790
ASDL1013RFXXIN018	18	120	145	155   58	2490
ASDL1014RFXXIN024	24	120	165	175   58	3090

## SWANK R



### RECESSED LED DOWN LIGHT

Arraystorm SWANK R LED Recessed High Efficiency Round Downlight, Body made of Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASDL1002RFXXIN007	7	120	108	114   44	990
ASDL1003RFXXIN010	10	120	136	142   44	1190
ASDL1003RFXXIN015	15	120	136	142   44	1290
ASDL1004RFXXIN018	18	120	194	200   44	1890
ASDL1004RFXXIN024	24	120	194	200   44	2590

## SWANK S



### SURFACE MOUNTED LED DOWN LIGHT

Arraystorm SWANK S Surface Mounted High Efficiency LED Round Downlight, Body made of Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASDL1002SFXXIN007H120	7	120	NA	114   120	1890
ASDL1003SFXXIN010H120	10	120	NA	142   120	2190
ASDL1003SFXXIN010H190	10	120	NA	142   190	2490
ASDL1003SFXXIN015H190	15	120	NA	142   190	2590
ASDL1004SFXXIN018H190	18	120	NA	200   190	2890
ASDL1004SFXXIN024H190	24	120	NA	200   190	3290

\*\*Add additional cost of suspension wire for suspending Swank S series.

## SUSPENSION WIRES (To be ordered separately for suspended Swank S downlighters)



Arraystorm adjustable universal suspension wire, for suspending luminaries from true ceiling.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSUSKIT1.5M single				1500	390
ASSUSKIT1.5M double				1500	750
ASSUSKIT1.5M Y				1500	1390

## SWANK SQUARE DR



### DEEP RECESSED LED DOWN LIGHT

Arraystorm SWANK SQUARE DR High Efficiency LED Deep Recessed Square Downlight, Body made of pressure diecast Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASDL1005RFXXIN007	7	120	100   100	110   110   50	1490
ASDL1005RFXXIN010	10	120	100   100	110   110   50	1690
ASDL1006RFXXIN015	15	120	135   135	145   145   58	1790
ASDL1006RFXXIN018	18	120	135   135	145   145   58	2590
ASDL1007RFXXIN024	24	120	150   150	160   160   58	3190



## LINEAGE R-65



### RECESSED LED CHANNEL LIGHT

Arraystorm LINEAGE R 6540 High Efficiency Recessed LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL6540RFXXIN010	10	120	605   60	610   65   40	3790
ASCL6540RFXXIN020	20	120	1203   60	1210   65   40	4590
ASCL6540RFXXIN030	30	120	1203   60	1210   65   40	4700
ASCL6540RFXXIN040	40	120	2393   60	2400   65   40	6890
ASCL6540RFXXIN060	60	120	2393   60	2400   65   40	7990

## LINEAGE R-88



### RECESSED LED CHANNEL LIGHT

Arraystorm LINEAGE R 8840 High Efficiency Recessed LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL8840RFXXIN010	10	120	605   60	610   88   40	4250
ASCL8840RFXXIN020	20	120	1203   60	1210   88   40	5250
ASCL8840RFXXIN030	30	120	1203   60	1210   88   40	5550
ASCL8840RFXXIN040	40	120	2393   60	2400   88   40	8950
ASCL8840RFXXIN060	60	120	2393   60	2400   88   40	10250

## LINEAGE S-50



### SUSPENDED LED CHANNEL LIGHT

Arraystorm LINEAGE S 5085 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL5085SFXXIN010	10	120	NA	600   50   85	3750
ASCL5085SFXXIN020	20	120	NA	1195   50   85	5850
ASCL5085SFXXIN030	30	120	NA	1195   50   85	6150
ASCL5085SFXXIN040	40	120	NA	2385   50   85	8750
ASCL5085SFXXIN060	60	120	NA	2385   50   85	10550

## LINEAGE S-72



### SUSPENDED LED CHANNEL LIGHT

Arraystorm LINEAGE S 7285 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots, 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL7285SFXXIN015	15	120	NA	600   72   85	4950
ASCL7285SFXXIN020	20	120	NA	1195   72   85	6900
ASCL7285SFXXIN030	30	120	NA	1195   72   85	7100
ASCL5085SFXXIN040	40	120	NA	2385   72   85	11300
ASCL5085SFXXIN060	60	120	NA	2385   72   85	12400

## FLUEDE



### SUSPENDED LED CHANNEL LIGHT

Arraystorm Fluede 9440 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and PMMA Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL9440SFXXIN010	10	120	NA	656   97   40	6850
ASCL9440SFXXIN020	20	120	NA	1245   97   40	9050
ASCL9440SFXXIN040	40	120	NA	2408   97   40	14250
ASCL9440SFXXIN060	60	120	NA	2408   97   40	16750



## LINEAGE S TZ




### SUSPENDED LED TECH ZONE CHANNEL LIGHT

Arraystorm LINEAGE S TZ High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog | White color tunable.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL14558RFXXIN015	15	120	NA	600   145   58	5750
ASCL14558RFXXIN030	30	120	NA	1195   145   58	7200
ASCL14558RFXXIN040	40	120	NA	2395   145   58	11300
ASCL14558RFXXIN060	60	120	NA	2395   145   58	12750

## LINEAGE S-50 UD



### SUSPENDED LED UP DOWN CHANNEL LIGHT

Arraystorm LINEAGE S UD 5085 High Efficiency Suspended Updown LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL5085SFXXIN09DN6UP	15	120	NA	600   50   85	5250
ASCL5085SFXXIN020DN10UP	30	120	NA	1195   50   85	6550
ASCL5085SFXXIN042DN18UP	60	120	NA	2385   50   85	11900
ASCL5085SFXXIN060DN24UP	84	120	NA	2385   50   85	13750

## LINEAGE S - 72 UD



### SUSPENDED LED UP DOWN CHANNEL LIGHT

Arraystorm LINEAGE S UD 7285 is High Efficiency Suspended Updown LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL7285SFXXIN014DN6UP	20	120	NA	600   72   85	4950
ASCL7285SFXXIN028DN12UP	40	120	NA	1195   72   85	7590
ASCL7285SFXXIN042DN18UP	60	120	NA	2385   72   85	13750
ASCL7285SFXXIN060DN24UP	84	120	NA	2385   72   85	14250

## LINEAGE S TZUD



### SUSPENDED LED CHANNEL LIGHT

Arraystorm LINEAGE S UD 14558 High Efficiency Suspended Updown LED Channel, Body made of extruded Aluminium and Opal Diffuser with homogeneous light distribution and without hotspots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL14558SFXXIN028DN12UP	40	120	NA	1195   145   58	10200
ASCL14558SFXXIN060DN24UP	84	120	NA	2395   145   58	20400

## LINEAGE R / S WALL WASHER



### RECESSED & SUSPENDED WALL WASHER LED CHANNEL LIGHT

Arraystorm LINEAGE R 7227 High Efficiency Recessed LED Wall Washer, Body made of extruded Aluminium and Wall Washer Lens. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASWW7227RFXXIN030	30	120	NA	1200   72   27	10900
ASWW7575SFXXIN030	30	120	NA	1200   75   75	14900





## LINEAGE S - LOUVER




### SUSPENDED LED CHANNEL LIGHT WITH DARK OPTICS WITH ALUMINIUM LOUVERS

Arraystorm LINEAGE S 5275 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Aluminium Louvers. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL5275SFXXIN030LOU	30	120	NA	1200   52   75	10900
ASCL5275SFXXIN060LOU	60	120	NA	2400   52   75	21500

## LINEAGE S - HONEYCOMB



### SUSPENDED LED CHANNEL LIGHT WITH DARK OPTICS WITH HONEYCOMB LOUVERS

Arraystorm LINEAGE S 5275 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Honeycomb Louvers. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL5275SFXXIN030HC	30	120	NA	1200   52   75	11500
ASCL5275SFXXIN060HC	60	120	NA	2400   52   75	22600

## LINEAGE S - DARK OPTICS



### SUSPENDED LED CHANNEL LIGHT WITH DARK OPTICS

Arraystorm LINEAGE S 2250 High Efficiency Suspended LED Channel, Body made of extruded Aluminium and Spot Reflectors. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL2250SFXXIN030DO	30	15 30 55	NA	1200   22   50	12100
ASCL3377SFXXIN030DO	30	15 30 55	NA	1200   33   77	14850
ASCL4477SFXXIN030DO	30	15 30 55	NA	1200   44   77	17900

## FABIA UD



### SUSPENDED LED ARCHITECTURAL LIGHT

Arraystorm FABIA High Efficiency Architectural Updown LED Suspended Luminaire, Body made of high grade extruded Aluminium in Matt White powder coated and extremely smooth homogeneous light across the transparent acrylic diffuser without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASAR0301SFXXIN040UPDN	40	120	NA	1198   220   8	19000

## FABIA DN



### SUSPENDED LED ARCHITECTURAL LIGHT

Arraystorm FABIA High Efficiency Architectural LED Suspended Channel, Body made of high grade extruded Aluminium in Matt White powder coated and extremely smooth homogeneous light across the transparent acrylic diffuser without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASAR0302SFXXIN040	40	120	NA	1198   220   8	11900



## FLO



### SUSPENDED LED CHANNEL LIGHT

Arraystorm FLO, Tubular Architectural Circular LED Linear Suspended Channel, Body made of extruded Aluminium and PMMA Diffuser with smooth homogeneous and gentle ceiling illumination with 340° light emission

230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASD035SFIXXIN020	20	120	NA	1195   35	10500
ASD035SFIXXIN040	40	120	NA	2395   35	20800
ASD050SFIXXIN020	20	120	NA	1195   50	12700
ASD050SFIXXIN040	40	120	NA	2395   50	25400
ASD070SFIXXIN030	30	120	NA	1195   70	14550
ASD070SFIXXIN060	60	120	NA	2395   70	29100
ASD120SFIXXIN030	30	120	NA	1195   120	17100
ASD120SFIXXIN060	60	120	NA	2395   120	30250

## BARNEY



### SUSPENDED LED ARCHITECTURAL PENDANT LIGHT

Arraystorm Barney is Suspended LED Architectural pendant Light, Body made of high- grade extruded Aluminium available in Matt White,Red, Black, Orange & Antique copper color, with PMMA diffuser for bright & homogeneous light.

230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASPN0401SFXXIN030	30	120	NA	400   210	10150

#### COLOUR OPTION



## BARNEY DOME



### SUSPENDED LED ARCHITECTURAL PENDANT LIGHT

Arraystorm Barney Dome is Suspended LED Architectural pendant Light, Body made of high- grade extruded Aluminium, with PMMA diffuser for bright & homogeneous light. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASPN0501SFXXIN035	35	120	NA	500   334	13750






# FORMS RANGE

Many centuries ago, geometry won us over with its precise lines, enchanting forms, and captivating symmetry. The same striking patterns and flows define a design language that is modern, minimal, and contemporary, yet completely timeless. Arraystorm Forms are an exploration of geometric shapes in designer lighting. Artfully composed, and technologically sound, they are designed to delight, both, in form as well as function.

Geometry inspires the signature design elements of this range, which encompasses elegant trapezoids, stylish triangles, and softly-glowing hexagons. Arraystorm Forms capture your imagination, and lend workspaces and meeting areas a sophisticated, compelling quality. For architects, and designers, it's a new dimension in lighting.





## ARIUM II



### SUSPENDED LED DRUM LIGHT

Arraystorm Arium 2, Hi-efficiency Suspended LED Drum Luminaire made of High - grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASAR8011SFXXIN030	30	120	NA	450   60	11300
ASAR8012SFXXIN040	40	120	NA	600   60	13900
ASAR8013SFXXIN060	60	120	NA	750   60	19900
ASAR8014SFXXIN080	80	120	NA	900   60	27500

## ARIUM III



### SUSPENDED LED DRUM LIGHT UP DOWN

Arraystorm Arium 3, Hi-efficiency Suspended LED up-down Drum Luminaire made of High - grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASAR8011SFXXIN020DN10UP	30	120	NA	450   60	14300
ASAR8012SFXXIN028DN12UP	40	120	NA	600   60	18300
ASAR8013SFXXIN042DN18UP	60	120	NA	750   60	24900
ASAR8014SFXXIN042DN18UP	60	120	NA	900   60	33500

## ARIUM IV



### SUSPENDED LED DRUM LIGHT

Arraystorm Arium 4, Hi-efficiency Recessed LED Drum Luminaire made of High - grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASAR8011RFXXIN030	30	120	390	450   60	10500
ASAR8012RFXXIN040	40	120	590	600   60	14000

## ORBIZ



### SUSPENDED LED RING LIGHT

Arraystorm Orbiz, Hi-efficiency Suspended LED Ring Luminaire made of high-grade extruded Aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCRD600SFXXIN040	40	120	NA	600   60	15900
ASCRD750SFXXIN060	60	120	NA	750   60	19250
ASCRD900SFXXIN080	80	120	NA	900   60	23500



## TRIA



### SUSPENDED LED TRIANGLE LIGHT

Arraystorm Tria, Hi-efficiency Suspended LED Triangle Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	MRP INR
ASAR9301SFXXIN030	30	120	NA	450   450   450   60	8250
ASAR9301SFXXIN040	40	120	NA	300   600   600   60	13500

## RHOMBIC



### SUSPENDED LED RHOMBUS LIGHT

Arraystorm Rhombic, Hi-efficiency Suspended LED Rhombus Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	MRP INR
ASAR9401SFXXIN030	30	120	NA	300   300   60	12700

## HEXOID



### SUSPENDED LED HEXAGON LIGHT

Arraystorm Hexoid, Hi-efficiency Suspended LED Hexagon Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	MRP INR
ASAR9101SFXXIN040	40	120	NA	300 each   60	18200
ASAR9102SFXXIN080	80	120	NA	600 each   60	37350

## HEXOID RING



### SUSPENDED LED HEXAGON RING LIGHT

Arraystorm Hexoid-Ring, Hi-efficiency Suspended LED Hexagon Ring Luminaire made of high-grade extruded aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	MRP INR
ASAR9201SFXXIN040	40	120	NA	300 each   60	17500
ASAR9202SFXXIN080	80	120	NA	600 each   60	31350

## TRAPEZOID



### SUSPENDED LED TRAPEZIUM LIGHT

Arraystorm Trapezoid, Hi-efficiency Suspended LED Trapezium Luminaire made of high-grade aluminium housing in Matt White color. Screwless and seamless circumference and extremely smooth homogeneous light through the frosted unbreakable polycarbonate diffuser, without hot spots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	MRP INR
ASGL4006SFXXIN030	30	120	NA	1192   395   195   60	15300



## SABER



### LED BATTEN LIGHT

Arraystorm SABER LED Batten, Body and Diffuser made of Polycarbonate. CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASBT9001SFXXIN010	10	120	NA	600   25   40	450
ASBT9001SFXXIN020	20	120	NA	1200   25   40	610

## SABER



### LED BATTEN LIGHT

Arraystorm SABER LED Batten, Body made of Aluminium and Acrylic Diffuser. CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASBT9002SFXXIN010	10	120	NA	600   25   40	690
ASBT9002SFXXIN020	20	120	NA	1200   25   40	890

## SABER



### LED BATTEN LIGHT

Arraystorm SABER LED Batten, Body made of Aluminium and Acrylic Diffuser. CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASBT9004SFXXIN020	20	120	NA	600   35   50	890
ASBT9004SFXXIN040	40	120	NA	1200   35   50	1320

## BANDSTORM (IP20)



### LED STRIP LIGHT

Arraystorm BANDSTORM is Decorative LED IP 20 Striplight The LED striplight gives a smoothing effect. 5m/Spool, 230 V with standard driver,

CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSR7001SFXXIN005	4.8	120	NA	NA	290
ASSR7002SFXXIN010	9.6	120	NA	NA	350
ASSR7003SFXXIN015	14.4	120	NA	NA	490

\*\*Add additional cost for constant voltage drivers depending upon length of strip light.

## BANDSTORM (IP65)



### LED STRIP LIGHT

Arraystorm BANDSTORM is Decorative LED IP 65 Striplight The LED striplight gives a smoothing effect. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSR7011SFXXIN005	4.8	120	NA	NA	450
ASSR7012SFXXIN010	14.4	120	NA	NA	550
ASSR7013SFXXIN015	14.4	120	NA	NA	850

\*\*Add additional cost for constant voltage drivers depending upon length of strip light.



## BANDSTORM DRIVER




### STRIP LIGHT DRIVER

Arraystorm Bandstorm IP 20 constant voltage Driver.

PRODUCT CODE	WATT W	DIMENSION (mm) L   W   H	MRP INR
ASDRISTR20W12V1.7A	20	78   46   33	690
ASDRISTR30W12V2.5A	30	115   52   36	950
ASDRISTR48W12V4A	48	115   52   36	1200
ASDRISTR72W12V6A	72	140   76   45	1690

## ALUMINIUM SECTIONS



### STRIP LIGHT ALUMINIUM SECTIONS

Arraystorm BANDSTORM casing is a IP 20 anodised aluminium surface mounted casing for enclosing LED Bandstorm striplight.

PRODUCT CODE	DIMENSION (mm) L   W   H	MRP INR
ASCL1606SF	1000   16   06	330
ASCL1612SF	1000   16   12	550
ASCL2206RF	1000   22   06	360
ASCL2212RF	1000   22   12	580





# RETAIL LIGHTING RANGE

Accent lighting for retail stores can help highlight certain parts of a retail store or provide a specific mood. LED lights in particular make excellent accent lamps with their longevity and color options. LED lighting offers energy efficient lighting solutions with a variety of options that can save money for retailers and maximize customer satisfaction with an enhanced shopping experience.



## Application areas

Hospitality

Retail shops

Commercial indoor spaces





## METEOR I



### RECESSED FIXED LED SPOT LIGHT

Arraystorm METEOR 1 is Recessed Fixed LED Spotlight, Body made of high grade die-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSL3000RFXXIN003BXX	3	12 24 36	52	52   88	1050
ASSL3001RFXXIN007BXX	7	12 24 36	65	69   70	1390
ASSL3002RFXXIN012BXX	12	24 36 48	75	83   74	1700
ASSL3003RFXXIN018BXX	18	24 36 60	90	95   90	2890
ASSL3003RFXXIN024BXX	24	24 36 60	90	95   90	3550
ASSL3003RFXXIN030BXX	30	24 36 60	90	95   90	4290
ASSL3003RFXXIN042BXX	42	24 36 60	90	95   90	5250

## METEOR II




### RECESSED MOVABLE LED SPOT LIGHT

Arraystorm METEOR 2 is Recessed adjustable LED Spotlight, Body made of high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSL3011RMXXIN007BXX	7	24 36 48	86	102   58	1950
ASSL3012RMXXIN012BXX	12	24 36 48	86	102   68	2750
ASSL3013RMXXIN018BXX	18	24 36 60	110	125   80	3590
ASSL3013RMXXIN024BXX	24	24 36 60	110	125   80	4250
ASSL3014RMXXIN030BXX	30	24 36 60	132	148   82	4690
ASSL3015RMXXIN042BXX	42	24 36 60	154	170   82	5290

## METEOR III



### RECESSED FIXED LED SPOT LIGHT

Arraystorm METEOR 3 Recessed Fixed LED Spotlight with Dark Optics, Body made of Aluminium high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSL3021RFXXIN006BXX	7	24 36 60	65	70   70	3050
ASSL3022RFXXIN012BXX	12	24 36 48	70	83   80	3890
ASSL3023RFXXIN018BXX	18	24 36 60	90	100   95	5225
ASSL3023RFXXIN024BXX	24	24 36 60	90	100   95	5890
ASSL3024RFXXIN030BXX	30	24 36 60	90	100   95	6850

#### REFLECTOR COLOUR OPTION



## METEOR IV



### TRIMLESS RECESSED FIXED LED SPOT LIGHT

Arraystorm METEOR 4 Trimless Recessed Fixed LED Spotlight, Body made of Aluminium high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSL3031RFXXIN007BXX	7	24 36 60	62	60   71	5500
ASSL3032RMXXIN012BXX	12	24 36 60	90	82   100	6100
ASSL3033RFXXIN018BXX	18	24 36 60	100	98   114	7150

#### REFLECTOR COLOUR OPTION



## METEOR V



### SUSPENDED FIXED LED CYLINDRICAL SPOT LIGHT

Arraystorm METEOR 5 is Surfaced/Suspended Fixed LED Cylindrical Spotlight, Body made of high grade extruded aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSL3041SFXXIN007BXX	7	24 36 60	NA	50   165	4250
ASSL3042SFXXIN018BXX	18	24 36 60	NA	70   165	4750
ASSL3043SFXXIN030BXX	30	24 36 60	NA	100   165	6500



## METEOR ZOOM



### RECESSED FIXED LED SQUARE SPOT LIGHT

Arraystorm METEOR 5 Recessed LED Zoom Spotlight, Body made of high grade di-cast Aluminium. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASZM3062RMXXIN010BXX	12	24 36 48	85	94   72	3850
ASZM3063RMXXIN020BXX	20	24 36 60	120	130   165	4950
ASZM3064RMXXIN030BXX	30	24 36 60	140	148   121	7150
ASZM3065RMXXIN042BXX	42	24 36 60	170	180   147	8250

## OMNISENSE I



### LED TRACK LIGHT

Arraystorm OMNISENSE 1 high power LED Tracklight, Body made of Aluminium and Anodised Reflector and driver housed in plastic enclosure. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASTR1101TMXXIN007BXX	7	24 36 48	NA	60   100	2910
ASTR1102TMXXIN012BXX	12	24 36 48	NA	80   120	3190
ASTR1103TMXXIN018BXX	18	24 36 60	NA	80   120	3850
ASTR1104TMXXIN030BXX	30	24 36 60	NA	180   147	4125

## OMNISENSE II



### LED TRACK LIGHT

Arraystorm OMNISENSE 2 high power LED Tracklight, Body made of Aluminium and Anodised aluminium reflector and driver housing in Die Cast enclosure. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASTR1112TMXXIN012BXX	12	24 36 48	NA	73   184	4950
ASTR1113TMXXIN020BXX	20	24 36 60	NA	93   189	6350
ASTR1114TMXXIN030BXX	30	24 36 60	NA	103   194	7150

## OMNISENSE TRACK



### TRACK FOR LED SPOT LIGHT

Arraystorm OMNISENSE Track, Body made of high grade extruded Aluminium.

PRODUCT CODE	DESCRIPTION	MRP INR
ASTL1122SMRAIL-1MTR	2 wire track for phase/neutral, 1 phase 240 V	1350
ASTL1123SMRAIL-1MTR	3 wire track for phase/neutral/earth, 1 phase 240 V	1550
ASTL1124SMRAIL-1MTR	4 wire track for, 3 phase 240 V or 1 phase with dimming	2550
ASTL1126SMRAIL-1MTR	6 wire track for phase/neutral/earth, 2 dimming, 3 phase 240 V	4150

\*\*Add additional cost for straight | L | T | X connectors accessories and suspension system. Price available on request

## SUSPENSION WIRES (To be ordered separately for suspended Swank S downlighters)




Arraystorm adjustable universal suspension wire, for suspending luminaries from true ceiling.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSUSKIT1.5M double				1500	750



## VANTAGE 12



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9001RMXXIN012BXX	12	24 36 48	92 92	100   100   89	3850

## VANTAGE 2X12



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9002RMXXIN024BXX	24	24 36 60	92 192	100   200   89	4950

## VANTAGE 3X12




### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9003RMXXIN036BXX	36	24 36 60	92 272	100   280   89	6350

## VANTAGE 20



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9004RMXXIN020BXX	20	24 36 60	109 109	126   126   104	6490

## VANTAGE 2X20



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9005RMXXIN040BXX	40	24 36 60	109 228	126   245   104	9790



## VANTAGE 3X20




### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9006RMXXIN060BXX	60	24 36 60	109 351	126   365   104	11550

## VANTAGE 30



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9007RMXXIN030BXX	30	24 36 60	160 160	175   175   115	10150

## VANTAGE 2X30



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9008RMXXIN060BXX	60	24 36 60	160 225	175   350   115	14100

## VANTAGE 3X30



### RECESSED LED GIMBAL LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGM9009RMXXIN090BXX	90	24 36 60	160 485	175   500   115	19250

## VANTAGE ZOOM 12



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9051RMXXIN012BXX	12	24 36 48	100 100	114   114   72	3850



## VANTAGE ZOOM 2X12



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimbal Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9052RMXXIN024BXX	24	24 36 60	220 100	232   114   72	4950

## VANTAGE ZOOM 3X12



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimbal Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9053RMXXIN036BXX	36	24 36 60	335 100	346   114   72	6050

## VANTAGE ZOOM 20



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Recessed LED Gimbal spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9054RMXXIN020BXX	20	24 36 60	130 130	137   137   102	7150

## VANTAGE ZOOM 2X20



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimbal Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9055RMXXIN040BXX	40	24 36 60	265 130	278   137   102	9350

## VANTAGE ZOOM 3X20



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimbal Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9056RMXXIN060BXX	60	24 36 60	405 130	418   137   102	10450

RESIDENTIAL



WORKSPACE



HEALTHCARE



RETAIL

Exclusive Partnership With



Experience the Sky



## EXPERIENCE THE SUN & SKY 'WHEREVER AND WHENEVER' YOU WANT?

Product Cat No	Luminaire Dimensions	Blue Sky Size	Weight
Arraystorm CoeLux 45 HC (270 W)	3761 x 2274 x h968 mm	870 x 1724 mm	330 KG
Arraystorm CoeLux 60 HC (270 W)	2892 x 2859 x 1556 mm	773 x 1884 mm	350 KG
Arraystorm CoeLux LS MATTE (90 W)	1200 x 600 x h465 mm	1086 x 295	30 KG

\*\* Prices will be available on request



## VANTAGE ZOOM 30



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Recessed LED Gimball spotlight, Body made of Aluminium and Anodised Aluminium Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9057RMXXIN030BXX	30	24 36 60	155 155	163   163   120	10450

## VANTAGE ZOOM 2X30



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9058RMXXIN060BXX	60	24 36 60	320 155	330   163   120	13750

## VANTAGE ZOOM 3X30



### RECESSED LED GIMBAL ZOOM LIGHT

Arraystorm VANTAGE Zoom is a Recessed LED Gimball Zoom spotlight, Body made of Aluminium and Anodised Reflector. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASGZ9059RMXXIN090BXX	90	24 36 60	480 155	495   163   120	15950


## METEOR SQUARE





### RECESSED FIXED LED SQUARE SPOT LIGHT

Arraystorm METEOR SQUARE is Recessed Fixed LED Square Spotlight, Body made of high grade di-cast Aluminium 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASSL3051RFXXIN002BXX	2	15 30 55	37 37	40   45   49	2100
ASSL3052RFXXIN006BXX	6	15 30 55	68 37	75   45   49	3650
ASSL3053RFXXIN010BXX	10	15 30 55	140 37	147   45   49	6900
ASSL3054RFXXIN018BXX	18	15 30 55	273 37	280   45   49	13750
ASSL3055RFXXIN030BXX	30	15 30 55	405 37	415   45   49	20200





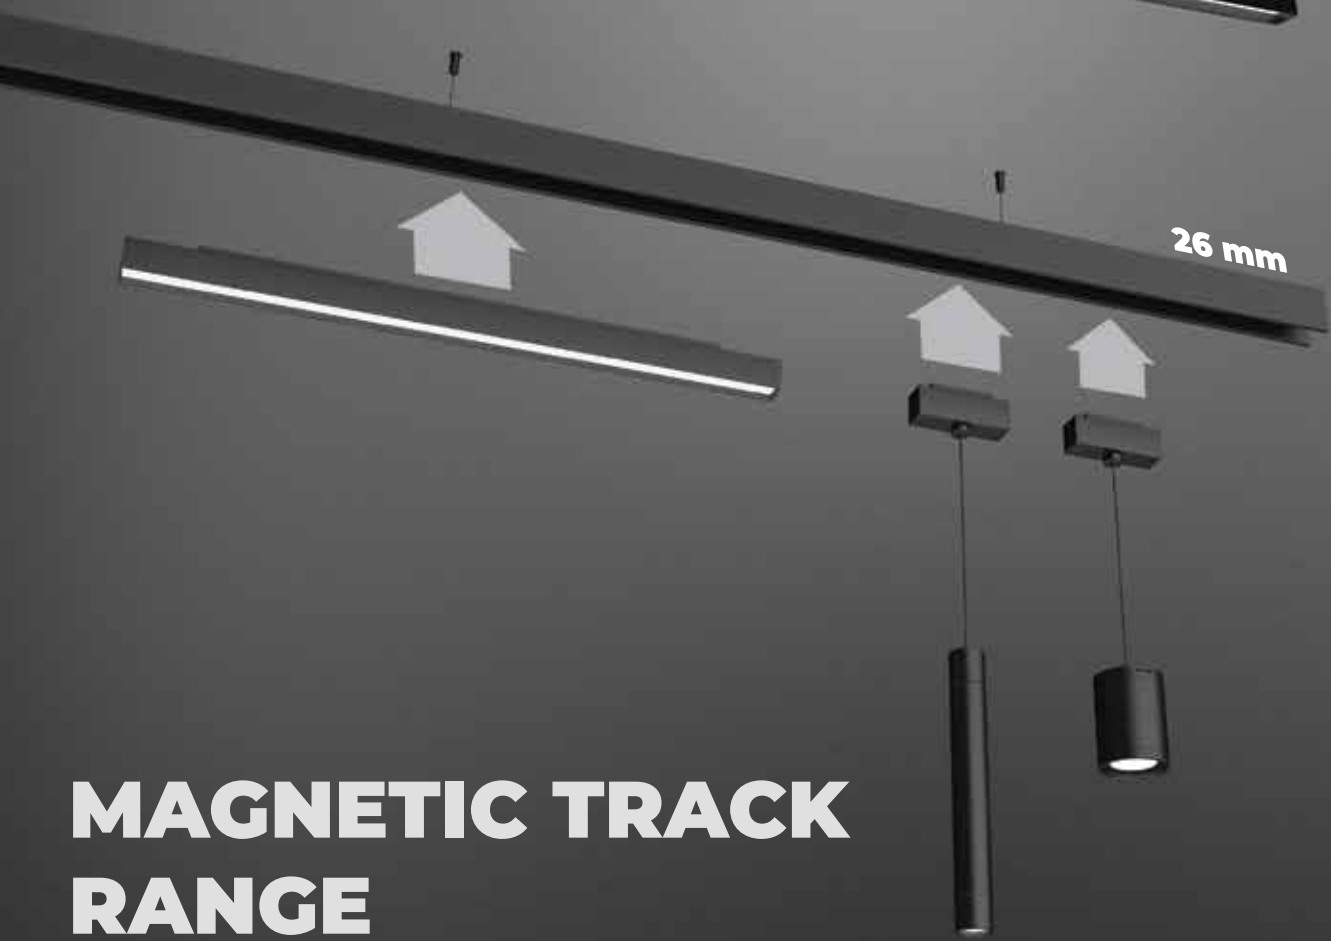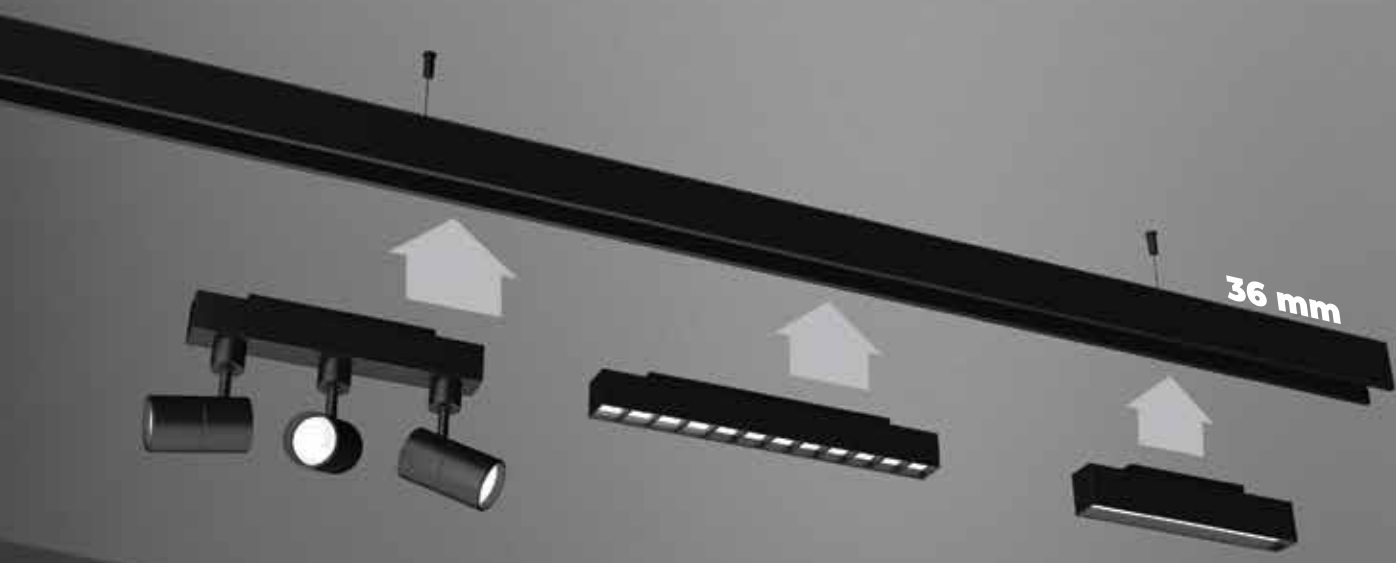

# MAGNETIC TRACK RANGE

\*\* Prices will be available on request



# INDUSTRIAL LIGHTING RANGE

An advanced lighting solution helps to optimize conditions at workstations in manufacturing bays, thereby increasing motivation and thus preventing fatigue and industrial accidents. Energy requirements in industrial complexes are often extremely high, due to the long operating and production hours, and hence require an energy efficient lighting solution.



## Application areas

**Industrial workplaces**  
**Warehouses**  
**Pharmaceuticals**



## BAYSTORM I



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-1, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0901PFXXIN40BXX	40	60 90	NA	180   180   340	6490
ASHB0901PFXXIN50BXX	50	60 90	NA	180   180   340	6990

## BAYSTORM II



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0902PFXXIN80BXX	80	60 90	NA	180   365   200	10190
ASHB0902PFXXIN100BXX	100	60 90	NA	180   365   200	10790

## BAYSTORM III



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0903PFXXIN120BXX	120	60 90	NA	412   412   340	14850
ASHB0903PFXXIN150BXX	150	60 90	NA	412   412   340	15290

## BAYSTORM IV



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-4, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0904PFXXIN160BXX	160	60 90	NA	385   385   200	23650
ASHB0904PFXXIN200BXX	200	60 90	NA	385   385   200	24090

## BAYSTORM VI



### SUSPENDED LED COB HIGHBAY LIGHT

Arraystorm COB BAYSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics with beam angles 60° / 90°. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0906PFXXIN240BXX	240	60 90	NA	385   570   200	39050
ASHB0906PFXXIN300BXX	300	60 90	NA	385   570   200	40150



## SMD BAYSTORM II



### SUSPENDED LED SMD HIGHBAY LIGHT

Arraystorm SMD BAYSTORM 2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0911PFXXIN80BXX	80	90	NA	310   160	8690
ASHB0911PFXXIN100BXX	100	90	NA	310   160	9190

## SMD BAYSTORM III



### SUSPENDED LED SMD HIGHBAY LIGHT

Arraystorm SMD BAYSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics with beam angles 60° / 90°. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0912PFXXIN120BXX	120	90	NA	357   165	11550
ASHB0912PFXXIN150BXX	150	90	NA	357   165	13750

## SMD BAYSTORM IV



### SUSPENDED LED SMD HIGHBAY LIGHT

Arraystorm SMD BAYSTORM-4, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics with beam angles 60° / 90°. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0913PFXXIN180BXX	180	90	NA	407   165	17490
ASHB0913PFXXIN200BXX	200	90	NA	407   165	17750

## BAYSTORM LINEAR



### SUSPENDED LED LINEAR HIGHBAY LIGHT

Arraystorm Linear Baystorm 1, Hi-efficiency LED Linear Highbay Luminaire, Body made of extruded aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASHB0921PFXXIN30BXX	30	60 90 120	NA	310   95   90	5750
ASHB0921PFXXIN50BXX	50	60 90 120	NA	510   95   90	7590
ASHB0921PFXXIN100BXX	100	60 90 120	NA	1010   95   90	14190
ASHB0922PFXXIN200BXX	200	60 90 120	NA	1010   95   90	28490
ASHB0923PFXXIN300BXX	300	60 90 120	NA	1010   95   90	42750

\*\*Available with clear and diffused cover option.



## FLOODSTORM I



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-1, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0901PMXXOD040BXX	40	60 90	NA	180   180   340	7050
ASFL0901PMXXOD050BXX	50	60 90	NA	180   180   340	7550

## FLOODSTORM II



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0902PMXXOD080BXX	80	60 90	NA	180   365   200	10750
ASFL0902PMXXOD100BXX	100	60 90	NA	180   365   200	11300

## FLOODSTORM III



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0903PMXXOD0120BXX	120	60 90	NA	412   412   340	15400
ASFL0903PMXXOD0150BXX	150	60 90	NA	412   412   340	15950

## FLOODSTORM IV



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-4, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0904PMXXOD0160BXX	160	60 90	NA	385   385   200	24450
ASFL0904PMXXOD0200BXX	200	60 90	NA	385   385   200	25050

## FLOODSTORM VI



### SUSPENDED LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium and hi-precision optics. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0906PMXXOD0240BXX	240	60 90	NA	385   385   200	39890
ASFL0906PMXXOD0300BXX	300	60 90	NA	385   385   200	40990



## SMD FLOODSTORM I



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-1, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0701PMXXOD010	10	120	NA	90   70   24	950
ASFL0702PMXXOD020	20	120	NA	145   120   40	1390
ASFL0703PMXXOD030	30	120	NA	145   120   40	2390

## SMD FLOODSTORM II



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-2, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium, with or without lens 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0704PMXXOD050	50	120	NA	230   195   58	2990
ASFL0704PMXXOD050B120	50	120	NA	230   195   58	3490

## SMD FLOODSTORM III



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-3, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0705PMXXOD080	80	120	NA	295   250   60	4950
ASFL0705PMXXOD080B120	80	120	NA	295   250   60	6490
ASFL0705PMXXOD100	100	120	NA	295   250   60	5775
ASFL0705PMXXOD100B120	100	120	NA	295   250   60	7150

## SMD FLOODSTORM IV



### LED COB FLOOD LIGHT

Arraystorm COB FLOODSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0706PMXXOD120	120	120	NA	355   290   62	8550
ASFL0706PMXXOD120B120	120	120	NA	355   290   62	9650
ASFL0706PMXXOD150	150	120	NA	355   290   62	9090
ASFL0706PMXXOD150B120	150	120	NA	355   290   62	10190

## SMD FLOODSTORM V



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-5, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0707PMXXOD180	180	120	NA	425   325   65	11890
ASFL0707PMXXOD180B120	180	120	NA	425   325   65	13490
ASFL0707PMXXOD200	200	120	NA	425   325   65	12390
ASFL0707PMXXOD200B180	200	120	NA	425   325   65	14300



## SMD FLOODSTORM VI



### LED SMD FLOOD LIGHT

Arraystorm SMD FLOODSTORM-6, Hi-efficiency LED Highbay Luminaire, Body made of di-cast aluminium with or without lens 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) SIZE   H	MRP INR
ASFL0708PMXXOD250	250	120	NA	412   412   340   65	17890
ASFL0708PMXXOD250B90	250	120	NA	412   412   340   65	20090
ASFL0708PMXXOD300	300	120	NA	412   412   340   65	18790
ASFL0708PMXXOD300B90	300	120	NA	412   412   340   65	20900





## INDUSTRIAL SABER



### LED INDUSTRIAL BATTEN LIGHT

Arraystorm INDUSTRIAL SABER, Hi-efficiency LED Batten Luminaire, Body made of extruded aluminium housing & polycarbonate opal finish. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASBT9003SFXXIN020	20	140	NA	592   56   74	2650
ASBT9003SFXXIN040	40	140	NA	1192   56   74	3290

## MAXIM TRUNKING INDUSTRIAL SABER



### LED INDUSTRIAL BATTEN TRUNKING

Arraystorm MAXIM TRUNKING System, Body made of extruded aluminium housing, can accommodate upto 9 wires for single phase / 3 phase / Emergency as well as dimming wires.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASTK9003SF- for 1 Mtr Trunk	NA	NA	NA	1196   58   52	2750
ASTK9003SFCOVER- for 1 Mtr Trunk	NA	NA	NA	NA	495
ASBT9003SFXXIN020WC	20	140	NA	592   56   67	2350
ASBT9003SFXXIN040WC	40	140	NA	1192   56   67	2750

\*\*Price of the trunk is with 4 wire loop in loop out. For 6 to 9 wire system price available on request.

## INDUSTRIAL SABER



### LED INDUSTRIAL BATTEN LIGHT

Arraystorm Industrial SABER LED Batten, Body made of co-extruded polycarbonate. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASBT9005SFXXIN020	20	140	NA	600   53   74	2990
ASBT9005SFXXIN040	40	140	NA	1200   53   74	3850

## WELL GLASS



### LED BAYSTAR LIGHT

Arraystorm BAYSTAR -1, Hi-efficiency LED Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASWG0911SFXX040	40	140	NA	175   218	5225
ASWG0911SFXX060	60	140	NA	225   240	11990

## BULK HEAD



### LED BAYSTAR LIGHT

Arraystorm BAYSTAR -2, Hi-efficiency LED Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASBK0921SFXX009	9	120	NA	212   82	1390





## OPTIMUS I



IP65

### LED STREET LIGHT

Arraystorm OPTIMUS LED Streetlight, Body made of die-cast Aluminium and lens. 230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K/6500K.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASST0801PFXOD020	20	120	NA	300   56   74	1925
ASST0802PFXOD024	24	120	NA	1192   56   74	2145
ASST0803PFXOD030	30	120	NA	1192   56   74	2255
ASST0804PFXOD036	36	120	NA	1192   56   74	2585
ASST0805PFXOD050	50	120	NA	1192   56   74	3025
ASST0806PFXOD060	60	120	NA	592   56   74	3245
ASST0807PFXOD080	80	120	NA	600   53   74	4950
ASST0808PFXOD100	80	120	NA	1200   53   74	6050
ASST0809PFXOD120	120	120	NA	592   56   74	6875

## OPTIMUS V



IP65

### LED STREET LIGHT

Arraystorm OPTIMUS LED Streetlight, Body made of Aluminium and Toughned glass cover and high precision lens. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K/6500K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASST0811PFXOD080	80	145 65	NA	600   53   74	10670
ASST0812PFXOD120	120	145 65	NA	1200   53   74	13970
ASST0813PFXOD160	160	145 65	NA	600   53   74	26070
ASST0814PFXOD200	200	145 65	NA	600   53   74	28270





# CLEANROOM LIGHTING RANGE

A customisable lighting solution for CLEANROOM environment helps to optimize conditions in Pharmaceuticals and Healthcare workplaces. These fixtures have been designed for protection against contamination, pollution, by organic & inorganic particles and maintain a complete dust free area.



## Application areas

Pharmaceutical Industry  
Chemical/Biological Lab  
Healthcare Premises



## EPIC BOCR (1X1)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2050SFXXIN016	16	120	300 300	320   320   75	7480
ASCR2050SFXXIN016SS	16	120	300 300	320   320   75	8910

## EPIC BOCR (2X2)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2051SFXXIN032	32	120	600 600	630   630   75	10890
ASCR2051SFXXIN042	42	120	600 600	630   630   75	11825
ASCR2051SFXXIN064	64	120	600 600	630   630   75	13090
ASCR2051SFXXIN084	84	120	600 600	630   630   75	14190
ASCR2051SFXXIN032SS	32	120	600 600	630   630   75	11990
ASCR2051SFXXIN042SS	42	120	600 600	630   630   75	13090
ASCR2051SFXXIN064SS	64	120	600 600	630   630   75	14190
ASCR2051SFXXIN084SS	84	120	600 600	630   630   75	15290

## EPIC BOCR (1X2)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2052SFXXIN018	18	120	600 300	630   330   75	9790
ASCR2052SFXXIN022	22	120	600 300	630   330   75	10890
ASCR2052SFXXIN018SS	18	120	600 300	630   330   75	10890
ASCR2052SFXXIN022SS	22	120	600 300	630   330   75	11990

## EPIC BOCR (1X4)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2053SFXXIN032	32	120	1200 300	1230   330   75	11990
ASCR2051SFXXIN042	42	120	1200 300	1230   330   75	13090
ASCR2051SFXXIN064	64	120	1200 300	1230   330   75	14190
ASCR2051SFXXIN084	84	120	1200 300	1230   330   75	15290
ASCR2053SFXXIN032SS	32	120	1200 300	1230   330   75	13090
ASCR2051SFXXIN042SS	42	120	1200 300	1230   330   75	14190
ASCR2051SFXXIN064SS	64	120	1200 300	1230   330   75	15290
ASCR2051SFXXIN084SS	84	120	1200 300	1230   330   75	16390



## EPIC BOCR (2X4)



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2054SFXXIN064	64	120	1200 600	1230   630   75	21890
ASCR2054SFXXIN084	84	120	1200 600	1230   630   75	22990
ASCR2054SFXXIN100	100	120	1200 600	1230   630   75	25190
ASCR2054SFXXIN120	120	120	1200 600	1230   630   75	28490
ASCR2054SFXXIN140	140	120	1200 600	1230   630   75	30690
ASCR2054SFXXIN064SS	64	120	1200 600	1230   630   75	24090
ASCR2054SFXXIN084SS	84	120	1200 600	1230   630   75	26290
ASCR2054SFXXIN100SS	100	120	1200 600	1230   630   75	28490
ASCR2054SFXXIN120SS	120	120	1200 600	1230   630   75	32890
ASCR2054SFXXIN140SS	140	120	1200 600	1230   630   75	35090

## EPIC BOCR (2X2) SCREWLESS



### RECESSED BOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Bottom Opening Clean Room (BOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2051SFXXIN032	32	120	600 600	630   630   75	11990
ASCR2051SFXXIN042	42	120	600 600	630   630   75	13090
ASCR2051SFXXIN064	64	120	600 600	630   630   75	14190
ASCR2051SFXXIN084	84	120	600 600	630   630   75	15290

## EPIC TOCR (1X1)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2060SFXXIN016	16	120	300 300	340   340   136	9350
ASCR2060SFXXIN016SS	16	120	300 300	340   340   136	10450

## EPIC TOCR (2X2)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2061SFXXIN032	32	120	600 600	640   640   136	11990
ASCR2061SFXXIN042	42	120	600 600	640   640   136	13090
ASCR2061SFXXIN064	64	120	600 600	640   640   136	14190
ASCR2061SFXXIN084	84	120	600 600	640   640   136	15290
ASCR2061SFXXIN032SS	32	120	600 600	640   640   136	14190
ASCR2061SFXXIN042SS	42	120	600 600	640   640   136	15290
ASCR2061SFXXIN064SS	64	120	600 600	640   640   136	16390
ASCR2061SFXXIN084SS	84	120	600 600	640   640   136	18590



## EPIC TOCR (1X2)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2062SFXXIN018	18	120	600 300	640   340   136	10890
ASCR2062SFXXIN022	22	120	600 300	640   340   136	11990
ASCR2062SFXXIN018SS	18	120	600 300	640   340   136	11990
ASCR2062SFXXIN022SS	22	120	600 300	640   340   136	13090

## EPIC TOCR (1X4)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2063SFXXIN032	32	120	1200 300	1240   340   136	13090
ASCR2063SFXXIN042	42	120	1200 300	1240   340   136	14190
ASCR2063SFXXIN064	64	120	1200 300	1240   340   136	15290
ASCR2063SFXXIN084	84	120	1200 300	1240   340   136	17050
ASCR2063SFXXIN032SS	32	120	1200 300	1240   340   136	14190
ASCR2063SFXXIN042SS	42	120	1200 300	1240   340   136	15290
ASCR2063SFXXIN064SS	64	120	1200 300	1240   340   136	16390
ASCR2063SFXXIN084SS	84	120	1200 300	1240   340   136	18590

## EPIC TOCR (2X4)



### RECESSED TOCR CLEANROOM LED GRID LIGHT

Arraystorm EPIC Top Opening Clean Room (TOCR) Recessed High Efficiency Cleanroom LED Gridlight, Body made of CRCA, Frame made of powder coated CRCA or Stainless Steel and Polycarbonate Diffuser with homogeneous light distribution without hotspots. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2064SFXXIN064	64	120	1200 600	1240   640   136	25190
ASCR2064SFXXIN084	84	120	1200 600	1240   640   136	27390
ASCR2064SFXXIN100	100	120	1200 600	1240   640   136	29550
ASCR2064SFXXIN120	120	120	1200 600	1240   640   136	32890
ASCR2064SFXXIN140	140	120	1200 600	1240   640   136	33990
ASCR2064SFXXIN064SS	64	120	1200 600	1240   640   136	28490
ASCR2064SFXXIN084SS	84	120	1200 600	1240   640   136	32890
ASCR2064SFXXIN100SS	100	120	1200 600	1240   640   136	33990
ASCR2064SFXXIN120SS	120	120	1200 600	1240   640   136	36190
ASCR2064SFXXIN140SS	140	120	1200 600	1240   640   136	37290

## EPIC BUND COVER



### BUND COVER FOR RECESSED TOCR CLEANROOM

Arraystorm EPIC TOCR Bund cover, Body made of powder coated CRCA.

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2070SF1X1BUNDCOVER	NA	120	300 300	350   350   85	3520
ASCR2071SF2X2BUNDCOVER	NA	120	600 600	650   650   85	4290
ASCR2072SF1X2BUNDCOVER	NA	120	600 300	650   350   85	4290
ASCR2073SF1X4BUNDCOVER	NA	120	1200 300	1250   350   85	4620
ASCR2074SF2X4BUNDCOVER	NA	120	1200 600	1250   650   85	7480



## FLAME PROOF CLEANROOM (1X1)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of powder coated CRCA and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2080FLXXIN030	30	120	275 275	312   312   140	21450
ASCR2080FLXXIN040	40	120	275 275	312   312   140	21890
ASCR2080FLXXIN050	50	120	275 275	312   312   140	22990

## FLAME PROOF CLEANROOM (1X1)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of Stainless Steel and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2080FLXXIN030SS	30	120	275 275	312   312   140	24090
ASCR2080FLXXIN040SS	40	120	275 275	312   312   140	24475
ASCR2080FLXXIN050SS	50	120	275 275	312   312   140	25850

## FLAME PROOF CLEANROOM (2X2)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of powder coated CRCA and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2081FLXXIN030	30	120	572 572	612   612   140	32175
ASCR2081FLXXIN040	40	120	572 572	612   612   140	32725
ASCR2081FLXXIN050	50	120	572 572	612   612   140	33550
ASCR2081FLXXIN060	60	120	572 572	612   612   140	34925
ASCR2081FLXXIN080	80	120	572 572	612   612   140	35750
ASCR2081FLXXIN100	100	120	572 572	612   612   140	36300

## FLAME PROOF CLEANROOM (2X2)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of Stainless Steel and high precision glass lens.230 V with standard driver, CRI>80, CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2081FLXXIN030SS	60	120	572 572	612   612   140	43450
ASCR2081FLXXIN040SS	80	120	572 572	612   612   140	44825
ASCR2081FLXXIN050SS	50	120	572 572	612   612   140	46200
ASCR2081FLXXIN060SS	60	120	572 572	612   612   140	47850
ASCR2081FLXXIN080SS	80	120	572 572	612   612   140	48400
ASCR2081FLXXIN100SS	100	120	572 572	612   612   140	28600



## FLAME PROOF CLEANROOM (1X2)



### RECESSED LED DOWN LIGHT

### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of powder coated CRCA and high precision glass lens.230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2082FLXXIN030	30	120	275 572	312   612   140	28600
ASCR2082FLXXIN040	40	120	275 572	312   612   140	29700
ASCR2082FLXXIN050	50	120	275 572	312   612   140	30800
ASCR2082FLXXIN060	60	120	275 572	312   612   140	40425
ASCR2082FLXXIN080	80	120	275 572	312   612   140	44000
ASCR2082FLXXIN100	100	120	275 572	312   612   140	45100

## FLAME PROOF CLEANROOM (1X2)



### RECESSED FLAME PROOF CLEANROOM LED GRID LIGHT

Arraystorm EPIC Flame Proof Recessed High Efficiency Cleanroom LED Gridlight, Body made of die cast Aluminium and Frame made of Stainless Steel and high precision glass lens.230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCR2082FLXXIN030SS	30	120	275 572	312   612   140	31350
ASCR2082FLXXIN040SS	40	120	275 572	312   612   140	32725
ASCR2082FLXXIN050SS	50	120	275 572	312   612   140	33550
ASCR2082FLXXIN060SS	60	120	275 572	312   612   140	43450
ASCR2082FLXXIN080SS	80	120	275 572	312   612   140	46750
ASCR2082FLXXIN100SS	100	120	275 572	312   612   140	47850

## BAYSTAR II



### FLAME PROOF LED WELLGLASS LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASWG0916FLXXIN030	30	120	NA	195   155	10450
ASWG0916FLXXIN040	40	120	NA	195   155	11825
ASWG0916FLXXIN050	50	120	NA	195   155	12925
ASWG0918FLXXIN060	60	120	NA	410   155	21725
ASWG0918FLXXIN080	80	120	NA	410   155	24475
ASWG0918FLXXIN100	100	120	NA	410   155	26675

## FLAME PROOF OPTIMUS



### FLAME PROOF LED STREET LIGHT

Arraystorm OPTIMUS 2 Flame Proof LED Streetlight, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASST0851FLXXOD030	30	120	NA	455   240   155	24200
ASST0851FLXXOD040	40	120	NA	455   240   155	24750
ASST0851FLXXOD050	50	120	NA	455   240   155	25190
ASST0852FLXXOD060	60	120	NA	455   240   155	26290
ASST0852FLXXOD080	80	120	NA	455   240   155	30800
ASST0852FLXXOD100	100	120	NA	455   240   155	32175



## FLAME PROOF FLOODSTORM I



### FLAME PROOF LED FLOOD LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0751FLXXOD060	60	120	NA	450   234   132	27775
ASFL0751FLXXOD080	80	120	NA	450   234   132	29700
ASFL0751FLXXOD100	100	120	NA	450   234   132	32725

## FLAME PROOF FLOODSTORM II




### FLAME PROOF LED FLOOD LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0752FLXXOD120	120	120	NA	664   234   132	42900
ASFL0752FLXXOD150	150	120	NA	664   234   132	45375

## FLAME PROOF FLOODSTORM III



### FLAME PROOF LED FLOOD LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof Wellglass Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASFL0753FLXXOD160	160	120	NA	450   450   132	57200
ASFL0753FLXXOD200	200	120	NA	450   450   132	61325

## BAYSTAR II



### FLAME PROOF LED REACTOR LIGHT

Arraystorm BAYSTAR 2 , Hi-efficiency LED Flame proof Reactor Luminaire, Body made of di-cast aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASRL0921FLXXIN010	10	120	NA	150   276	9350
ASRL0921FLXXIN020	20	120	NA	150   276	10450
ASRL0921FLXXIN040	40	120	NA	150   276	11990

## BAYSTORM II



### FLAME PROOF LED LINEAR LIGHT

Arraystorm BAYSTAR , Hi-efficiency LED Flame proof LinearLight, Body made of extruded aluminium housing. 230 V with standard driver, CRI>80,

CCT available in 3000K/4000K/5700K. Driver also available in DALI | Analog

PRODUCT CODE	WATT W	BEAM ANGLE	CUTOUT (mm) L   W	DIMENSION (mm) L   W   H	MRP INR
ASCL127105FLXXOD030	30	120	NA	127   105	11550
ASCL127105FLXXOD050	50	120	NA	127   105	15950



ARRAYSTORM'S PHOTOMETRIC LAB FROM DENMARK



# MANUFACTURING & DESIGN

The state-of-the-art factory in Bangalore features fully equipped machines for 'pick and place' of LEDs along with machines for 'made-to-measure' profile productions. All employees receive extensive training to guarantee best craftsmanship standards. Ongoing investment in people, infrastructure and production capabilities keep our product ranges at the forefront of the market's requirements.

Arraystorm Design Center stretches its wings to disciplines such as optical, mechanical, software, electronics, and electrical engineering. Relying on in-house engineering expertise, our products are created with a deep understanding of customer and industry requirements, enabling us to bring functional, quality products from concept to life, in record time.

ARRAYSTORM'S ALUMINIUM CUTTING MACHINE FROM ITALY

# TESTING & QUALITY

The team at Arraystorm follows the strictest quality parameters, to ensure products and services are designed and produced to exceed customer requirements. Arraystorm's team of engineers are on a continuous search for new age design with emphasis on energy-efficiency and optimal quality of light. Through extensive in-house testing, advanced product development, and continuous optimization of materials used, Arraystorm is able to provide functional lighting which excels in optimal performance, durability, and efficiency. Product quality and safety testing is done in accordance with international standards by government accredited lighting laboratories such as UL and Intertek.

ARRAYSTORM'S SMT LINE FROM JAPAN



## General conditions of business

- All prices are in Indian Rupees only
- List price are inclusive of GST. However authorized Arraystorm Sales teams / channel partners and Stockists can sell below the List price
- All prices are subject to RR Kabel's general terms and condition of business
- All prices are with standard product specifications. Any changes in understanding of specifications would lead to a price difference
- Prices lists are subject to change without notice as per company's discretion
- Company reserves the right to issue amendments, which may rise due to any errors in price list
- Continuous design changes is a routine practice of RR Kabel. Data provided may change without any prior intimation
- Customers are advised to reconfirm the data or product dimensions before purchase with our local offices
- All orders should be placed in writing
- All orders should be placed in the name of RR Kabel Limited. Arraystorm is a lighting brand owned by RR Kabel Ltd
- All orders to be placed in multiples of case lots only
- Disputes, if any are subject to Mumbai jurisdiction
- This price list supersedes any prior price list of Arraystorm

---

Although every effort has been made to ensure accuracy in the compilation of the technical detail in this price list, however the current details' specifications of all components needs to be checked with RR Kabel's Arraystorm team before placing of orders as the Specifications , design and the performance data are constantly being upgraded till the issue of next price list.

Copyright notice: . Imitation of product images. trade marks , graphics and color scheme of this document is a punishable offence.



Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

T: +91 - 22 - 2494 9009 / 2492 4144 • F: +91 - 22 - 2491 2586 • E: mumbai.rrkabel@rrglobal.com

305/A, Windsor Plaza, R. C. Dutt Road, Alkapuri, Vadodara - 390 007.

T: +91 - 265 - 2321 891 / 2 / 3 • F: +91 - 265 - 2321 894 • E: vadodara.rrkabel@rrglobal.com

---

## **R R KABEL LIMITED**

**Regd. Office :** Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

**H.O. Arraystorm Lighting Div.:** No.2318, 2nd Floor, Sector 1, 27th Main Road, Opp. NIFT, HSR Layout, Bengaluru - 560102.  
+91 80 2976 5570 / 71, Email : info@arraystorm.com

**Ahmedabad:** 079 - 4900 0100 , **Bengaluru:** 080-0000 0000, **Bhubaneswar:** 0674 - 2971 231,

**Chennai:** 044 - 2829 2329 / 2429, **Coimbatore:** 0422 - 2910 560, **Guwahati:** 0361 - 2730772,

**Indore:** 0731 - 4009 863, **Jaipur:** 0141 - 2741417, **Jalandhar:** 0181 - 500 3394, **Ernakulam:** 0484 - 2378 782,

**Kolkata:** 033 - 6607 1233 / 2262 8660, **Lucknow:** 0522 - 4113 745 / 46, **Madurai:** 0452 - 4370 340,

**New Delhi:** 011 - 4303 8395 / 2735 5477 / 78, **Pune:** 020 - 2567 7207,

**Raipur:** 0771 - 2971 518, **Rajkot:** 0932 7722 501, **Secunderabad:** 040 - 2780 4098,

**Silvassa:** 0260 - 2641 333, **Surat:** 9376 507 543, **Trichy:** 8939 830 338.

[www.arraystorm.com](http://www.arraystorm.com) • [www.rrglobal.com](http://www.rrglobal.com)